


SHIELD BRAKE FLUID

DESCRIPTION

Shield's Brake Fluid contains anti-oxidants, metal deactivators and corrosion inhibitors to provide a longer service life for your brake components. The fluid's high boiling point ensures that vapor lock problems in high temperature working conditions do not accrue.

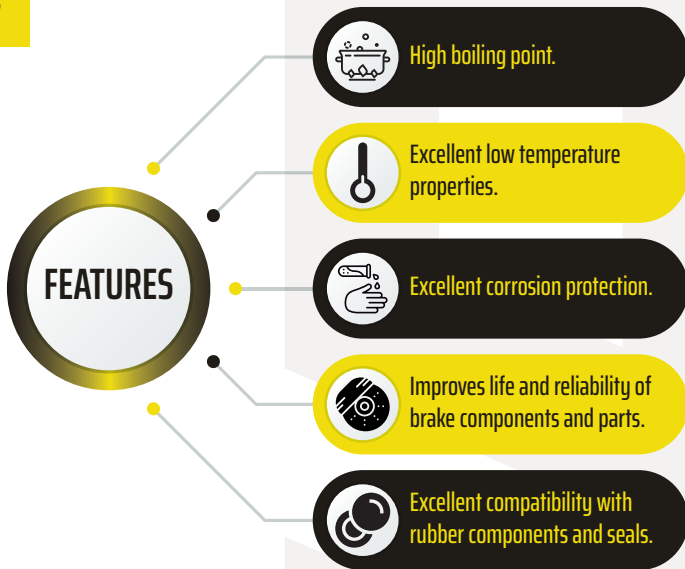

PERFORMANCE LEVELS:

- FMVSS No. 116 - DOT 3
- SAE J1703
- FMVSS No. 116 - DOT 4
- SAE J1704
- U.S. Federal Motor Vehicle Safety Standards

APPLICATIONS:

Shield Brake Fluids are recommended for all conventional drum and disc brake systems. They can also be used in hydraulic clutch release systems.

TYPICAL PHYSICAL PROPERTIES

SL#	Characteristics Unit	Test Method	DOT 3	DOT 4
1	Density @ 15°C	ASTM D 1298	1.05	1.10
2	Viscosity @ 40°C, cSt	ASTM D 445	2	2.2
3	Pour Point, °C	ASTM D 97	> -50	> -50
4	pH		9	9
5	Color	ASTM D 1500	Amber	Amber
6	Appearance	ASTM D 4176	C & B	C & B

* Exact specifications may slightly vary from the above, but within the international standards