




# SHIELD - DE-DUSTING OIL

DESCRIPTION

Shield's De-dusting Oil is an excellent oil for preventing dust formation in several operations. These oils are blended from superior quality virgin base oils and carefully selected additives which provide high flash point, high viscosity characteristics and a long service life.

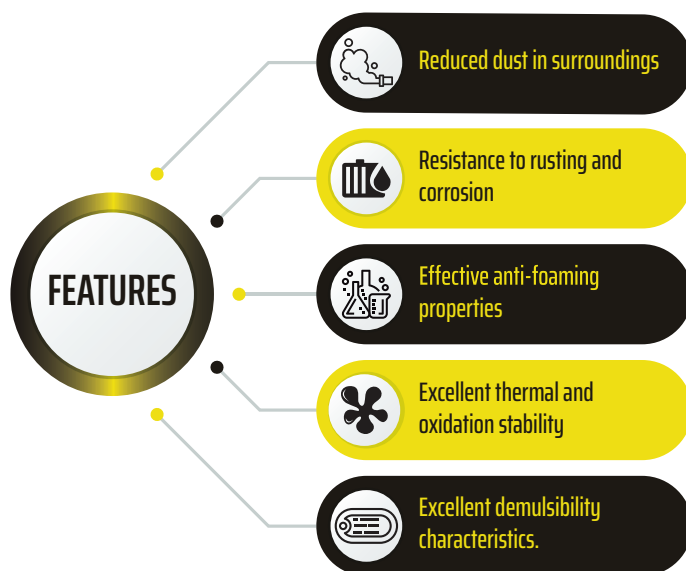

## APPLICATIONS:

The Shield De-dusting Oil is used primarily for suppressing the fine dust particles which arise during the manufacturing and transportation of Calcined Petroleum Coke.

TYPICAL PHYSICAL PROPERTIES			
SL#	Characteristics Unit	Test Method	De-dusting Oil
1	Kinematic Viscosity @ 40 OC, cSt	ASTM D 445	95
2	Flash Point COC, °C	ASTM D 92	250
3	Pour Point, °C	ASTM D 92	-18
4	Viscosity Index	ASTM D 92	99
5	Aniline Point, °C	ASTM D 611	min. 100°C

\* Exact specifications may slightly vary from the above, but within the international standards