




# SHIELD - DIESEL ENGINE OIL SAE 10W40 - SYNTHETIC BLEND

DESCRIPTION

Shield's Diesel Engine Oil SAE 10W40 Synthetic Blend is a superior quality heavy-duty multigrade lubricant for diesel engines. It is blended using premium quality virgin, synthetic base oils and advanced additives that offer the best possible lubrication. It assures excellent protection against high temperature engine deposits, oil degradation, and forms a thick oil film that protects engine parts from friction and wear.

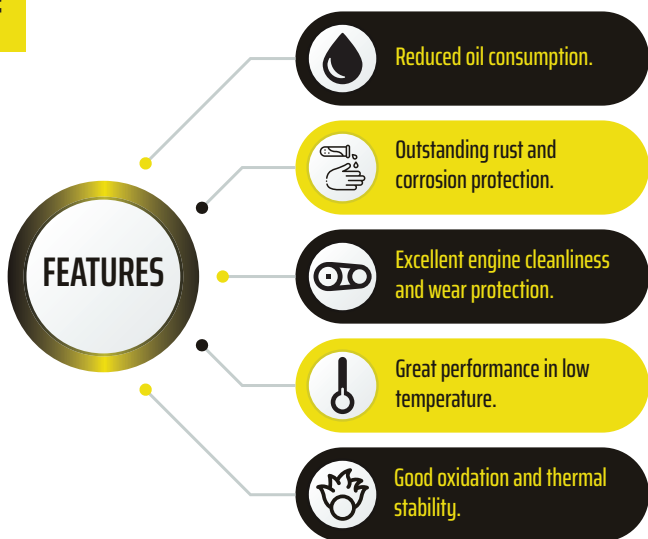

### PERFORMANCE LEVELS:

- API CK4, CJ4, CI4, CH4, CF4.
- CUMMINS CES 20081, CES 20086.
- Mack EOS 4.5, EO-O Premium Plus-07.
- CATERPILLAR ECF-3, ECF-2, ECF-1a.
- DAIMLER MERCEDES-BENZ MB 228.31, MB 228.3.
- VOLVO VDS-4.4, VDS-3.
- RENAULT VI RLD-4, RLD-3.
- ACEA E7-16 / E9-16.
- ACEA E3-B4 -08.
- MAN 3275 / 3575.
- FORD WSS - M2 C171 - F1.
- DETROIT DIESEL 93K222 / 93K218
- MTU TYPE 2.1.
- DEUTZ DQC111 - 10LA.

## APPLICATIONS:

Shield's Diesel Engine Oil SAE 10W40 Synthetic Blend is recommended for mixed fleets of automotive diesel truck manufacturers, on-highway light and heavy-duty trucking, and off-highway industries including: construction, mining, quarrying, agriculture and diesel generator sets.

## TYPICAL PHYSICAL PROPERTIES

SL#	Characteristics Unit	Test Method	API Grade / Performance Level				
			10W40 CK4	10W40 CJ4	10W40 CI4	10W40 CH4	10W40 CF4
1	Density @ 15°C	ASTM D 1298	0.8760	0.8760	0.8760	0.8760	0.8760
2	Viscosity @ 40°C	ASTM D 445	115	115	115	115	115
3	Viscosity @ 100°C	ASTM D 445	15.3	15.3	15.3	15.3	15.3
4	Viscosity Index	ASTM D 2270	139	139	139	139	139
5	Flash Point COC, °C	ASTM D 92	220	220	220	220	220
6	Pour Point, °C	ASTM D 97	-35	-35	-35	-35	-35
7	Total Base Number, mgKOH/g	ASTM D 2896	10	10	10	10	10
8	Color	ASTM D 1500	L1.5	L1.5	L1.5	L1.5	L1.5
9	Appearance	ASTM D 4176	C & B	C & B	C & B	C & B	C & B

\*Exact specifications may slightly vary from the above, but within the international standards