




# SHIELD - DIESEL EXHAUST FLUID

DESCRIPTION

Shield's Diesel Exhaust Fluid is made from high purity synthetic urea and deionized water. It is a stable, colorless, nonflammable nontoxic fluid. This special formula will help in maintaining a functioning selective catalytic reduction (SCR) system. Reduces harmful nitrogen oxide emissions and even improves fuel efficiency. It is a simple to use, low cost, clean solution to meet the 2010 EPA clean air act requirements.

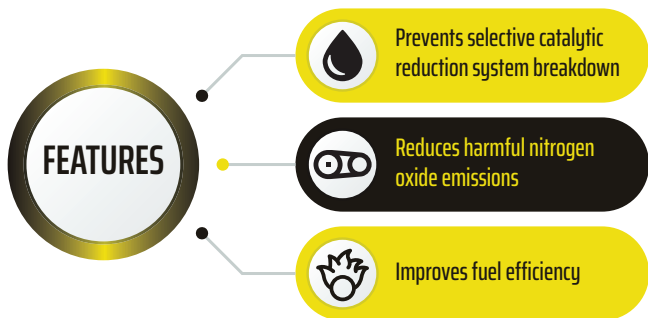

**PERFORMANCE LEVELS:**

- ISO 22241-1 standards.
- 2010 EPA Clean Air Act.

## APPLICATIONS:

Shield's diesel exhaust fluid for use in passenger vehicles, trucks, construction and agricultural equipment. It is compatible with all Tier 4 final compliant equipment using Selective Catalytic Reduction (SCR) technology.

## TYPICAL PHYSICAL PROPERTIES

SL#	Characteristics Unit	Value
1	Boiling Point	>100°C
2	Specific Gravity	1.02
3	Appearance	Colorless clear liquid
4	Evaporation Rate	<1
5	PH	8.5

\*Exact specifications may slightly vary from the above, but within the international standards